

lubingsystem.com

lubingsystem.com

lubingsystem.com

lubingsystem.com

LUBING GREENTEC

lubingsystem.com

lubingsystem.com

lubingsystem.com

HR PUMPS

lubingsystem.com

FOR THE GREENTEC FOGGING-SYSTEM



THE ADVANTAGES OF LUBING HR PUMPS

- highly resistant by using stainless steel components and high resistant plastics
- hygienic through the possibility to use disinfectant
- environmentally friendly – with the frequency converter, the energy requirement is always adjusted to the level currently required. This saves energy and reduces noise pollution



TECHNICAL DATA


D-Line pump units	7222	7223	7227	7228
Max. flow rate [l/min.]	13 (15)	21 (25)	max. 15	max. 25
Max. no. of nozzles	150 (165)	250 (280)	160	280
Min. number of nozzles	50 (55)	90 (105)	6	10
Max. operating pressure [bar]	70			
Motor power [kW]	2,2	4	2,2	4
Frequency converter	No	No	Yes	Yes
Max. currency consumption [A]	5,4	9,1	5,4	9,1
Inlet connection	3/4"			
Oil filling quantity (15W-40) [l]	0,37	1,1	0,37	1,1

Values for 50 Hz, values in brackets for 60 Hz.
Standard voltage 400 V 50 / 60 Hz. Special voltages on request!

POWER

Energy consumption of the D-Line Vario HR pump unit

The Vario pump unit contributes to sustainable and environmentally friendly operation by intelligently adjusting its own power.

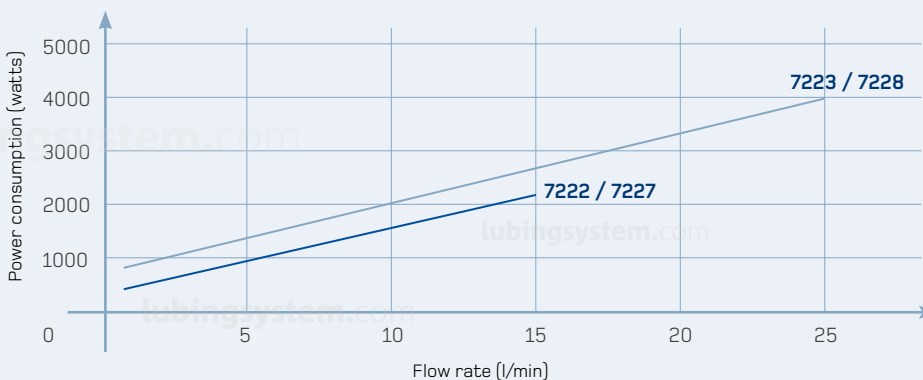

Via the frequency converter, the speed of the pump is adapted to the actual amount of water required in the system. The power consumption is also controlled in this way according to demand. If the amount of water required is low, the power consumption is automatically reduced.

LUBING
GREENTEC

Further information under
WWW.LUBING-GREENTEC.NET

LUBING SYSTEM SRL

Via Marco Polo, 33 - Campodarsego - PD - Italy

☎ +39 049 9202290

✉ +39 049 9201234

www.lubing-greentec.net · info@lubing.it

lubingsystem.com

0843-1/22-06 · Subject to technical changes.