

LUBING GREENTEC

PLASTIC-PADS

FOR THE GREENTEC PAD-SYSTEM



THE ADVANTAGES OF THE PLASTIC-PADS

- **For evaporative cooling of greenhouses.**
- **Excellent cooling capacity – patented design:** The special layout of solid surfaces and mesh structures ensures perfect water distribution all through the Pad. This allows perfect wetting, less splashing water, and therefore excellent cooling capacity.
- **Easy to clean:** The use of welded, highly resistant polymer sheets allows the Plastic-Pad to be cleaned without difficulty and without damaging the Pads.
- **Long service life:** The use of polymer sheets in combination with thermal welding guarantees best stability and a long service life.
- **Lowest pressure loss:** The Plastic-Pad is characterized by low pressure loss. At an air velocity of 1,5 m/s the Plastic-Pad's pressure drop is only at 10 Pa. Because of the low pressure drop the Plastic-Pad minimizes the energy consumption substantially.
- **High UV resistance:** The use of UV-stabilizing additives ensures outstanding resistance to UV light for years.
- **Impermeable to light:** The Plastic-Pad's geometry blocks out light.
- **Chemical resistance:** The Plastic-Pad is made of Polypropylene. This material is highly resistant to most of all chemicals.

VERSIONS


Dimensions	Art. No.
500 x 600 x 150 mm	7988-0500
1000 x 600 x 150 mm	7988-1000
1500 x 600 x 150 mm	7988-1500
1800 x 600 x 150 mm	7988-1800
2000 x 600 x 150 mm	7988-2000
2200 x 600 x 150 mm	7988-2200
2400 x 600 x 150 mm	7988-2400

Other dimensions on request.



TECHNICAL DATA

Efficiency and pressure drop

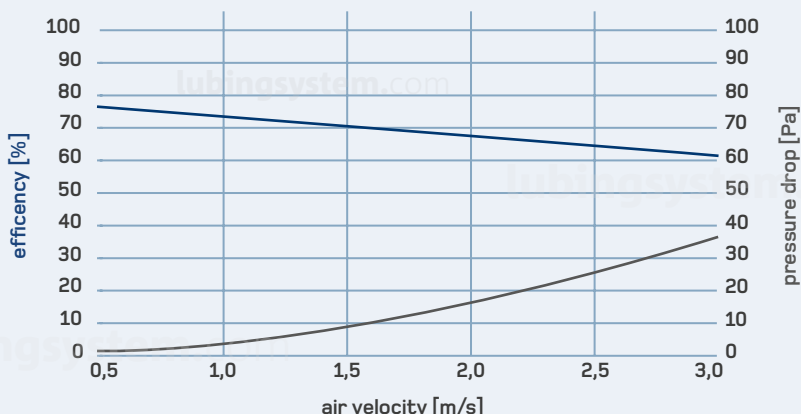

Outside conditions: 32,4°C at 36,7 % RH
 Inside conditions: 24,5°C at 73,0 % RH

**LUBING
GREENTEC**

Further information under
WWW.LUBING-GREENTEC.NET

LUBING SYSTEM SRL

Via Marco Polo 33 - Campodarsego - PD - Italy

☎ +39 0499202290

✉ +39 049 9201234

www.lubing-greentec.net · info@lubing.it

0850-1/22-06 · Subject
 to technical changes.